



样品承认书

(RoHS Compliance)

客戶名稱

Customer

料號

Part No.

圖號

Drawing No.

品名

Part Name

: **XRRH6*10*4**

日期

Date

: **18-Nov-23**

貴公司確認

Approved by

☐

Approval 承認

☐

Tentative approval with the following changes 暫時承認, 修改如下

☐

Reject with the following reasons 不承認, 原因如下

Comments 意見

備注 : 樣品如無問題, 煩請貴司承認後盡快將承認書回傳我司!

Remark : Please return a copy of us if approved by your organization.

SPECIFICATION			RoHS Compliant
CUSTOMER		SHEET NO.	Page 1 of 4
			2023-11-18
PART NAME	FERRITE CORE	MODEL NAME	
PART NO.		TYPE	XRRH6*10*4

1. PRODUCT IDENTIFICATION & PICTURE

XRRH 6 * 10 * 4
 1 2 3 4

Naming Method


- 1 Type
- 2 External Diameter
- 3 Height
- 4 Internal Diameter



Configurations

Product Picture

2. DIMENSIONS

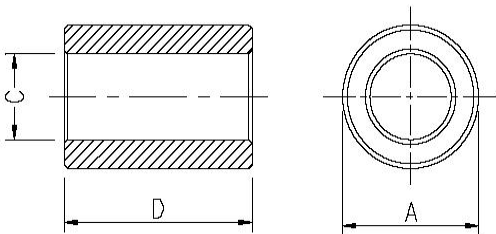

Configuration	Dimensions (mm)	
A	6.00	±0.3
B		
C	4.00	±0.3
D	10.00	±0.3
E		
F		
G		
H		
I		

3. ELECTRICAL CHARACTERISTICS

No.	Characteristics		Testing Conditions
	Frequency	Impedance	
1	25 MHz	20 Ω Min.	Equipment : HP 4191A Fixture : Winding : Ø0.65mm 2 UEW L : 120mm 1 Turns
2	100 MHz	50 Ω Min.	


东莞市祥如电子有限公司	DESIGN	CHECK	APPROVAL
	范进	李燕	陈荣斌

SPECIFICATION			RoHS Compliant	
CUSTOMER		SHEET NO.	Page 2 of 4	
		DATE	2023-11-18	
PART NAME	FERRITE CORE	MODEL NAME		
PART NO.		TYPE	XRRH6*10*4	
4. LIST OF MATERIALS				
No.	Components	Name of Material	Manufacture of Material	Remarks
1	Core	Ni-Zn Ferrite (F9S)	Sheng & Ci Electronics (HK) Ltd.	RoHS compliant
5. RELIABILITY TEST				
No.	Item	Test Conditions		Remarks
1	Vibration	Frequency : 10 ~ 55Hz		No evidence of damage (Electrical and Appearance)
		Amplitude : 0.762 mm		
		X-axis, Y-axis, Z-axis : 2 hr, each direc.		
6. OPERATION CONDITIONS				
No.	Item	Test Conditions		Remarks
1	Operation Temperature	-25 ~ +85°C		If any doubtful results is obtained, conduct the relevant test again at 23 ± 2°C and a relative Humidity of 60 ~ 70%
2	Storage Temperature	-25 ~ +85°C		
3	Typical Condition of measurement	Temperature	25 ± 15°C	
		Humidity	45 ~ 85%	
7. STANDARD PARKAGING CONDITION & Weight				
No.	Material	Quantity		Remarks
1	Plastic Bag	pieces / packet		
2	TB Box	packets / TB Box		
3	Carton Box	pieces / Carton Box		
4	Weight per piece	gm		Approximate Weight
5	Weight per carton box	Kg		Approximate Weight
东莞市祥如电子有限公司		DESIGN	CHECK	APPROVAL
		范进	李燕	陈荣斌

SPECIFICATION			RoHS Compliant
CUSTOMER		SHEET NO.	Page 3 of 4
		DATE	2023-11-18
PART NAME	FERRITE CORE	MODEL NAME	
PART NO.		TYPE	XRRH6*10*4

8. IMPEDANCE Vs FREQUENCY CHARACTERISTICS

$Z(\Omega)$ \ Freq. (MHz)	1	10	25	50	80	100	150	200	250	300	350	400	500	600	700	800	900	1000
XRRH6*10*4	3.8	16	28	45	65	75	130	180	300	520	789	850	420	320	240	200		

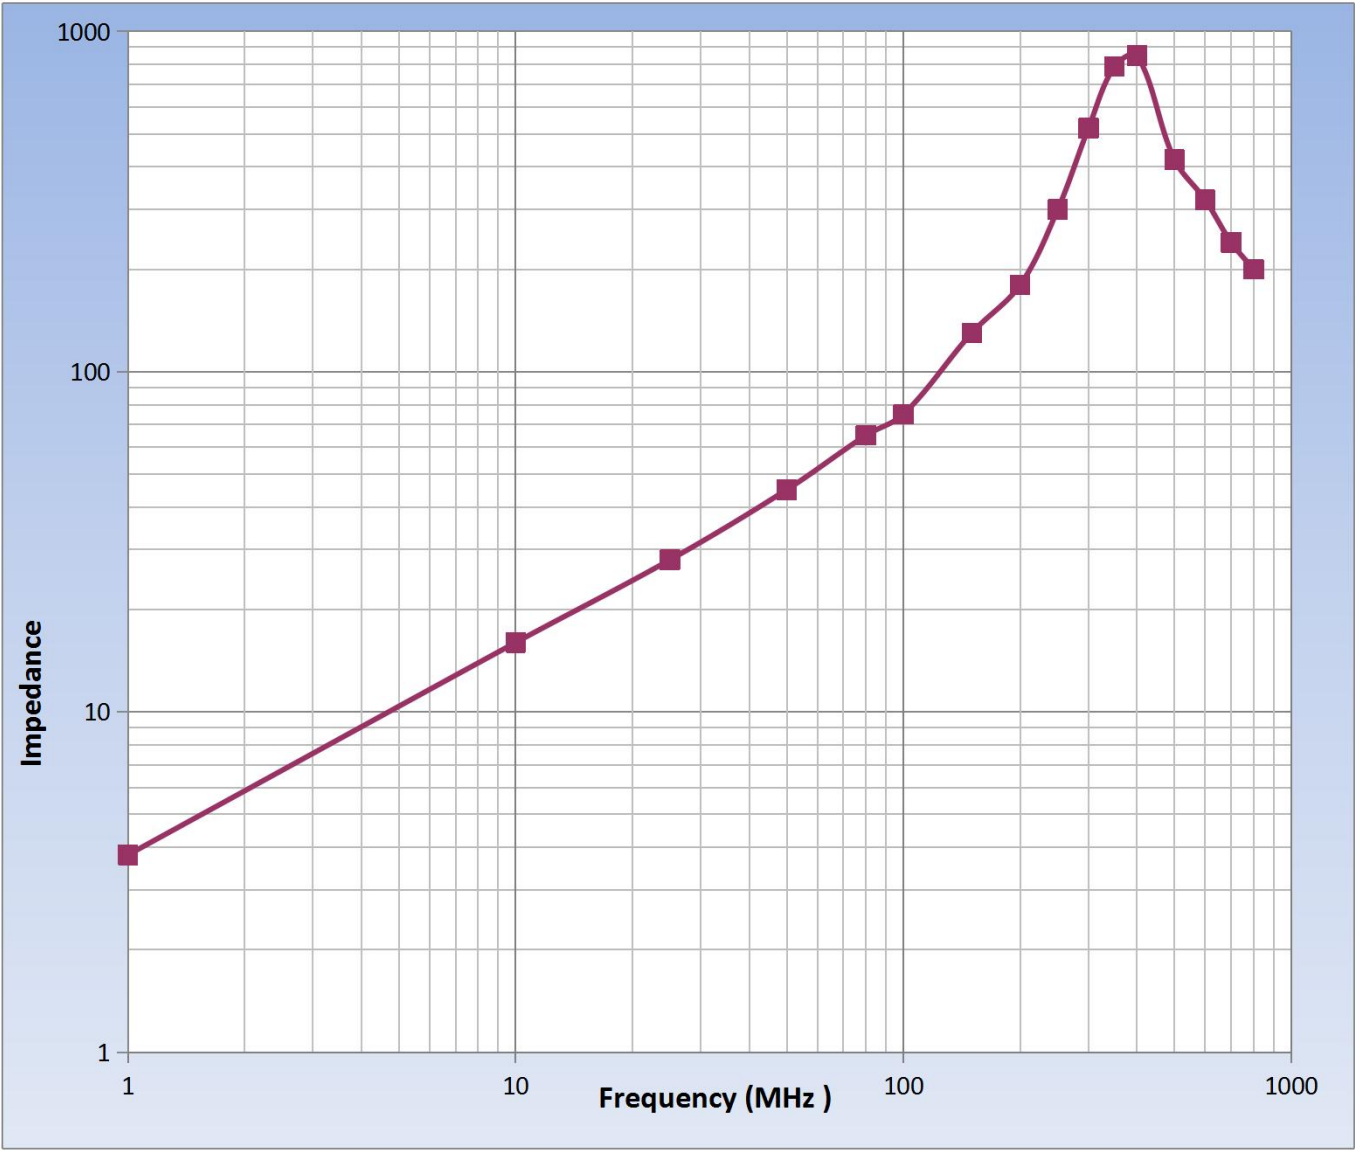

东莞市祥如电子有限公司	DESIGN	CHECK	APPROVAL
	范进	李燕	陈荣斌

SPECIFICATION			RoHS Compliant
CUSTOMER		SHEET NO.	Page 4 of 4
		DATE	2023-11-18
PART NAME	FERRITE CORE	MODEL NAME	
PART NO.		TYPE	XRRH6*10*4

9. INSPECTION DATA

Checking Instrument : Agilent E4991A Impedance Analyzer

Test Condition : Ø 0.65mm 2 UEW L : 120mm 1Turn

Temperature : 24°C Humidity : 60%

1	Impedance (Ω)			Dimensions			
Conf.	at 25MHZ	at 100MHz		A	C	D	
Spec	20 Ω	50 Ω		6.00	4.00	10.00	
	Min	Min		± 0.3	± 0.3	± 0.3	
1	28.5	75.8		5.95	4.02	10.00	
2	27.8	76.0		5.98	4.05	9.95	
3	28.1	75.8		6.02	4.04	10.04	
4	28.7	76.4		5.97	4.07	10.02	
5	27.8	74.9		6.01	4.03	9.97	
6							
7							
8							
9							
10							
X	28.18	75.78		5.986	4.042	9.996	
R	0.9	1.5		0.07	0.05	0.09	

Remarks

东莞市祥如电子有限公司	DESIGN	CHECK	APPROVAL
	范进	李燕	陈荣斌