

零 件 承 认 书



SPECIFICATION FOR APPROVAL

客户名称: 立创

客户料号:

增益料号: BCMS321609A000

规格描述: BCMS321609A000

日 期: 2023/10/30

版 本: A

增益签核:

制订	审核	核准
夏琳		李万



客户签核:

工程	审核	核准



东莞市增益实业有限公司

地址: 东莞市塘厦镇林村塘厦大道北552号
电话: 0769-87321000
传真: 0769-87891229

物料类型:	贴片磁珠
日 期:	2023/10/30
版 本:	A

图面规格变更履历表

PAGE: 1 of 4

NAME	Ferrite Chip EMI Suppressors BCMS-321609	COMPOSITE SPECIFICATION	
		SPEC#	BCMS321609A000

1. SCOPE

This specification applies to the BCMS-3216 series Ferrite Chip EMI suppressors.

2. STANDARD ATMOSPHERIC CONDITIONS

Unless otherwise specified the standard range of atmospheric conditions for making measurements and tests is as follows:

Ambient temperature : $20 \pm 15^\circ\text{C}$

Relative humidity : 30~70%

If there may be any doubt on the results, measurements shall be made within the following limits :


Ambient temperature : $25 \pm 5^\circ\text{C}$

Relative humidity : 30~70%

3. RATINGS

PART NO	IMPEDANCE (Ω) AT 100 MHz 500mV	DC RESISTANCE (Ω) Max	RATED CURRENT (mA) Max
BCMS321609A000	$0 \pm 25\%$	0.015	6000

4. DIMENSION

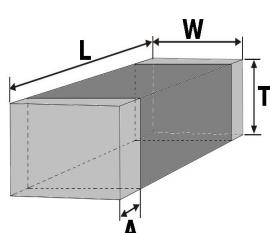


OPERATING TEMP. RANGE : $-55^\circ\text{C} \sim +125^\circ\text{C}$
STORAGE TEMP. RANGE : $-10^\circ\text{C} \sim +40^\circ\text{C}$

TYPE	L	W	T	A
BCMS-3216	3.2 ± 0.2 (.126±.008)	1.6 ± 0.2 (.063±.008)	0.9 ± 0.2 (.043±.008)	$0.5 \sim 1.0$

5. The place of origin :

Taichung, Taiwan

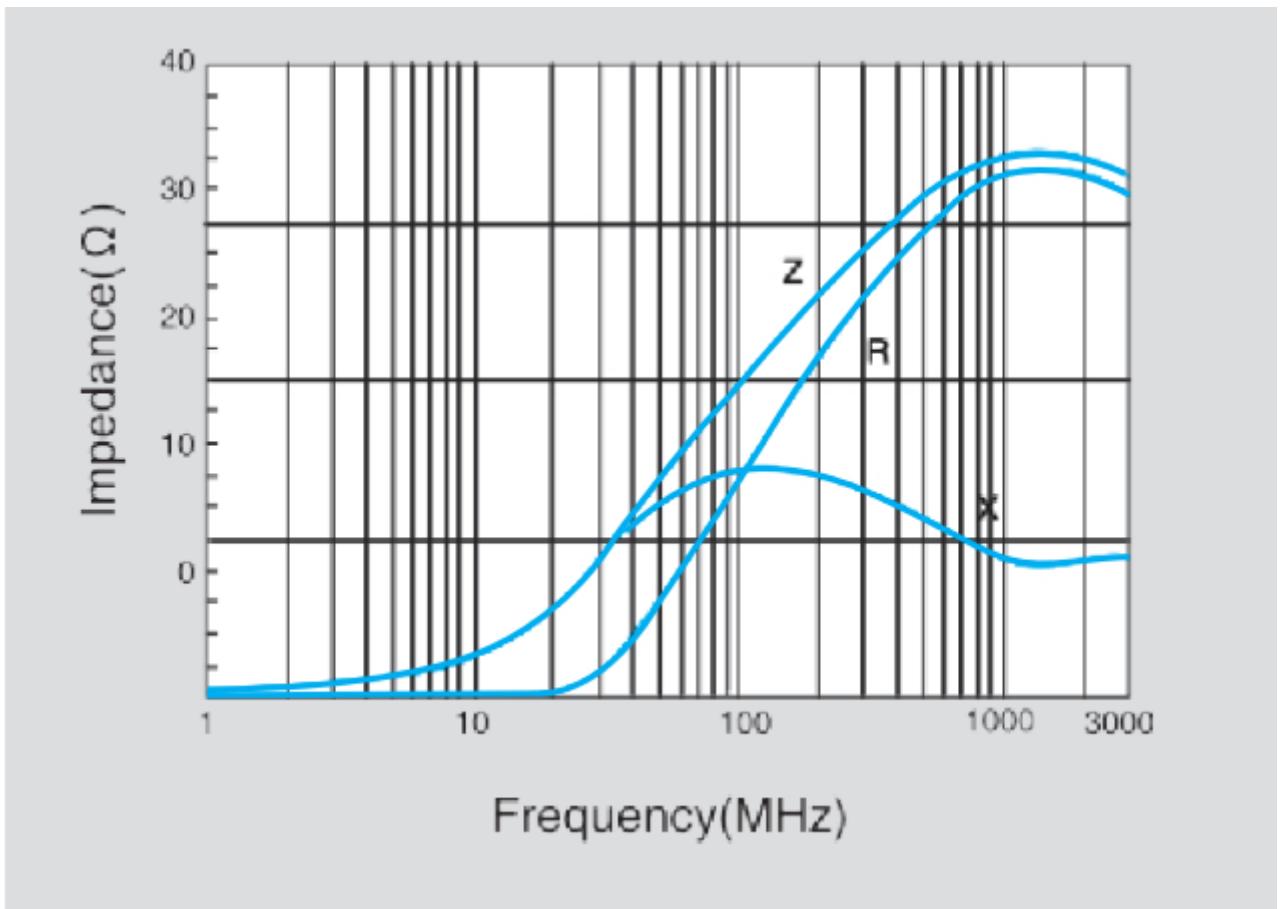NAME	Ferrite Chip EMI Suppressors BCMS-321609	COMPOSITE SPECIFICATION																									
		SPEC#	BCMS321609A000																								
BCMS321611A000																											
 <p>Graph showing Impedance (Ω) versus Frequency (MHz) for BCMS321611A000. The graph displays three curves: Z (total impedance), R (resistance), and X (reactance). The Z curve shows a sharp increase in impedance starting around 100 MHz, reaching approximately 32 Ω at 3000 MHz. The R curve follows a similar but slightly lower path, reaching approximately 30 Ω at 3000 MHz. The X curve is negative at low frequencies, crosses zero at approximately 100 MHz, and then decreases, reaching a minimum of about -1 Ω at 3000 MHz.</p> <table border="1"><caption>Approximate data points from the BCMS321611A000 impedance graph</caption><thead><tr><th>Frequency (MHz)</th><th>Z (Ω)</th><th>R (Ω)</th><th>X (Ω)</th></tr></thead><tbody><tr><td>1</td><td>2</td><td>2</td><td>-2</td></tr><tr><td>10</td><td>5</td><td>4</td><td>-1</td></tr><tr><td>100</td><td>15</td><td>12</td><td>0</td></tr><tr><td>1000</td><td>32</td><td>30</td><td>-1</td></tr><tr><td>3000</td><td>32</td><td>30</td><td>-1</td></tr></tbody></table>				Frequency (MHz)	Z (Ω)	R (Ω)	X (Ω)	1	2	2	-2	10	5	4	-1	100	15	12	0	1000	32	30	-1	3000	32	30	-1
Frequency (MHz)	Z (Ω)	R (Ω)	X (Ω)																								
1	2	2	-2																								
10	5	4	-1																								
100	15	12	0																								
1000	32	30	-1																								
3000	32	30	-1																								


NAME	Ferrite Chip EMI Suppressors	COMPOSITE SPECIFICATION	
	BCMS-321609	SPEC#	BCMS321609A000

6) Reflow soldering conditions


- Pre-heating should be in such a way that the temperature difference between solder and ferrite surface is limited to 150°C max. Also cooling into solvent after soldering should be in such a way that the temperature difference is limited to 100°C max.

Unenough pre-heating may cause cracks on the ferrite, resulting in the deterioration of product quality.

- Products should be soldered within the following allowable range indicated by the slanted line. The excessive soldering conditions may cause the corrosion of the electrode, When soldering is repeated, allowable time is the accumulated time.

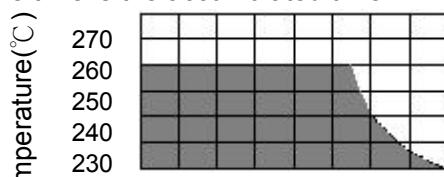

Temperature Profile

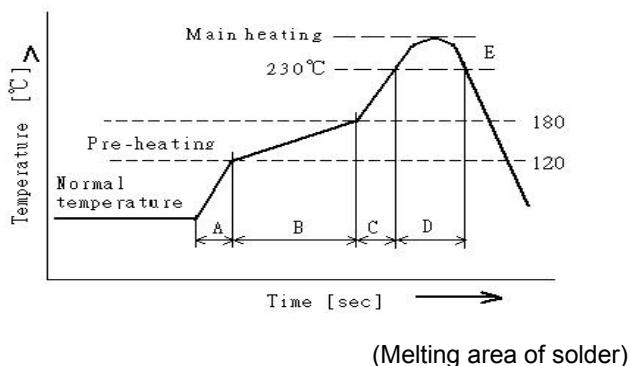

A	Slope of temp. rise	※ 1 to 5	※ °C/sec
B	Heat time	50 to 150	※ sec
	Heat temperature	120 to 180	※ °C
C	Slope of temp. rise	1 to 5	※ °C/sec
D	Time over 230°C	90~120	※ sec
E	Peak temperature	255~260	※ °C
	Peak hold time	10 max.	※ sec
※ No. of mounting		3	※ times

6-1 Reworking with soldering iron

Preheating	150°C, 1 minute
Tip temperature	280°C max
Soldering time	3seconds max.
Soldering iron output	30w max.
End of soldering iron	§ 3mm max.

- Reworking should be limited to only one time.

Note : Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the ferrite material due to the thermal shock.

6-2 Solder Volume

Solder shall be used not to be exceed the inner limits as shown below.



Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance.

NAME	Ferrite Chip EMI Suppressors BCMS-321609	COMPOSITE SPECIFICATION	
		SPEC#	BCMS321609A000

7 EQUIPMENT


7-1 IMPEDANCE

Impedance shall be measured with HP—4286A impedance analyzer or equivalent system

7-2 DC RESISTANCE

DC resistance shall be measured using HP 4338 digital mili—ohm meter with 4 terminal method.

8.MECHANICAL CHARACTERISTICS

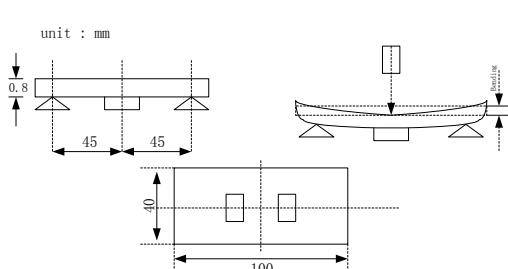ITEM	Specification	TEST CONDITIONS
TERMINAL STRENGTH	Without deformation cases impedance shall be satisfied $\pm 30\%$ DC resistance shall be satisfied.	Solder chip on PCB and applied 10N (1.02Kgf) for 10 sec 
Substrate bending test	Without deformation cases, impedance shall be satisfied $\pm 30\%$ DC resistance shall be satisfied.	After soldering a chip to a test substrate, bend the substrate by 3mm hold for 10s and then return. Soldering shall be done in accordance with the recommended PC board pattern and reflow soldering. 
RESISTANCE TO SOLDER HEAT	No visible damage Electrical characteristics and mechanic characteristics shall be satisfied. Consult standard MIL-STD-202 METHOD 210	Solder Temp. : $265 \pm 3^\circ\text{C}$ Immersion time : 6 ± 1 sec Preheating : 100°C to 150°C , 1 minute. Measurement to be made after keeping at room temp for 24 ± 2 hrs. Solder : Sn-3Ag-0.5Cu
SOLDER—ABILITY	95% min. coverage of all metabolised area Consult standard J-STD-002	Solder temp. : $240 \pm 5^\circ\text{C}$ Immersion time : 3 ± 1 sec Solder : Sn-3Ag-0.5Cu


NAME	Ferrite Chip EMI Suppressors BCMS-321609	COMPOSITE SPECIFICATION		
		SPEC#	BCMS321609A000	
9. RELIABILITY AND TEST CONDITIONS				
9-1 HIGH TEMPERATURE RESISTANCE				
<p>a. Performance specification</p> <ol style="list-style-type: none"> 1. Appearance : no mechanical damage 2. Impedance shall be with $\pm 30\%$ of the initial value 3. DC resistance shall be satisfied <p>b. Test condition</p> <ol style="list-style-type: none"> 1. Temperature $125^{\circ}\text{C} \pm 2^{\circ}\text{C}$ 2. Applied current : Rated current(maximum value) 3. Testing time : $1008 \pm 12\text{hrs}$ 4. Measurement : After placing at room ambient temperature for 24 hours minimum 				
9-2 HUMIDITY RESISTANCE				
<p>a. Performance specification</p> <ol style="list-style-type: none"> 1. Appearance : no mechanical damage 2. Impedance:within $\pm 30\%$ of initial value 3. DC resistance shall be satisfied <p>b. Test condition</p> <ol style="list-style-type: none"> 1. Humidity : 90 to 95% RH 2. Temperature : $60 \pm 2^{\circ}\text{C}$ 3. Applied current : Rated current (maximum value) 4. Testing time : $1008 \pm 12\text{hours}$ 5. Measurement : After placing at room ambient temperature for 24 hours minimum 				
9-3 TEMPERATURE CYCLE				
<p>a. Performance specification</p> <ol style="list-style-type: none"> 1. Appearance : no mechanical damage 2. Impedance:within $\pm 30\%$ of initial value 3. DC resistance shall be satisfied <p>b. Test condition</p> <ol style="list-style-type: none"> 1. Temperature $-55^{\circ}\text{C} , +125^{\circ}\text{C}$ kept stabilized for 30 minutes each 2. Cycle : 100 cycles 3. Measurement : After placing for 24 hours minimum at room ambient temperature 4. step1. -55°C temp$\pm 3^{\circ}\text{C}$ 30 ± 3 minutes step2. Standard atmospheric conditions 5s or less step3. $+125^{\circ}\text{C}$ temp$\pm 2^{\circ}\text{C}$ 30 ± 3 minutes step4. Standard atmospheric conditions 5s or less 				
9-4 LOW TEMPERATURE STORAGE LIFE TEST				
<p>a. Performance specification</p> <ol style="list-style-type: none"> 1. Appearance : no mechanical damage 2. Impedance shall be with $\pm 30\%$ of the initial value 3. DC resistance shall be satisfied <p>b. Test condition</p> <ol style="list-style-type: none"> 1. Temperature $-55^{\circ}\text{C} \pm 2^{\circ}\text{C}$ 2. Testing time : $1008 \pm 12\text{hours}$ 3. Measurement : After placing for 24 hours minimum at room ambient temperature 				
9-5 THERMAL SHOCK				
<p>a. Performance specification</p> <ol style="list-style-type: none"> 1. Appearance : no mechanical damage 2. Impedance shall be with $\pm 30\%$ of the initial value <p>b. Test condition</p> <ol style="list-style-type: none"> 1. Temperature $-55^{\circ}\text{C} , +125^{\circ}\text{C}$ kept stabilized for 30 minutes each 2. Cycle : 100 cycles 3. Measurement : After placing for 24 hours minimum at room ambient temperature 				
9-6 VIBRATION TEST				
<p>a. Performance specification</p> <ol style="list-style-type: none"> 1. Appearance : no mechanical damage 2. Impedance shall be with $\pm 30\%$ of the initial value <p>b. Test condition</p> <ol style="list-style-type: none"> 1. Waveform:Sine wave 2. Frequency:10~55~10 Hz 3. Sweep time:1min 4. Amplitude:1.5mm(peak-peak) 5. Direction:X,Y,Z(3 axes) 6. Duration:2 hrs./axis,total 6 hrs. 				

NAME	Ferrite Chip EMI Suppressors BCMS-321609	COMPOSITE SPECIFICATION											
		SPEC#	BCMS321609A000										
10. EMBOSSED CARRIER TAPE PACKAGING													
10-1 DIMENSIONS													
A0	B0	W	F	E	P1	P2	P0	D0	D1	K	T	T2	
1.88 ±0.1	3.5 ±0.1	8.0 ±0.2	3.5 ±0.05	1.75 ±0.1	4.0 ±0.1	2.00 ±0.05	4.0 ±0.1	1.55 ±0.05	1.0 ±0.1	1.27 ±0.1	0.23 ±0.1	1.27 ±0.1	
10-2 LEADER AND TRAILER TAPE													
10-3 DIRECTION THE DIRECTION SHALL BE SEEN FROM THE TOP OF COVER TAPE													
10-4 REELS													
PACKING QTY. 3,000 PCS REEL													
<table border="1"> <tr> <td>UNIT:mm</td> <td></td> </tr> <tr> <td>A</td><td>178 ±2.0</td> </tr> <tr> <td>N</td><td>50 MIN</td> </tr> <tr> <td>W1</td><td>10 ±1.5</td> </tr> <tr> <td>W2</td><td>20 MAX</td> </tr> </table>				UNIT:mm		A	178 ±2.0	N	50 MIN	W1	10 ±1.5	W2	20 MAX
UNIT:mm													
A	178 ±2.0												
N	50 MIN												
W1	10 ±1.5												
W2	20 MAX												

NAME	Ferrite Chip EMI Suppressors BCMS-321609	COMPOSITE SPECIFICATION	
		SPEC#	BCMS321609A000

10-5 PEELING STRENGTH OF COVER TAPE

Cover tape	(10g~100g)
------------	------------

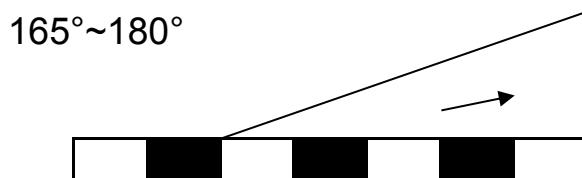

Test condition

- 1) peel angle : 165°~180° vs carrier tape
- 2) peel speed : 300mm/min

11.PACKAGING

- 1) Tape & Reel packaging in composite specification 6/8
- 2) Reel and a bag of desiccant shall be packed in Nylon or plastic bag
- 3) Maximum of 5 bags shall be packaged in a inner box
- 4) Maximum of 6 inner box shall be packaged in a outer box

12.Reel Label

Producing the goods label needs to indicate (1) Pb Free (2) RoHS Compliant

NAME	Ferrite Chip EMI Suppressors	COMPOSITE SPECIFICATION		
	BCMS-321609	SPEC#	BCMS321609A000	

13. STORAGE

- 13-1 The solderability of the external electrode may be deteriorated if packages are stored where they are exposed to high humidity. Packages must be stored at 40°C or less and 70% RH or less.
- 13-2 The solderability of the external electrode may be deteriorated if packages are stored where they are exposed to dust or harmful gas (hydrogen chloride, sulfurous acid gas or hydrogen sulfide).
- 13-3 Packaging material may be deformed if packages are stored where they are exposed to heat or direct sun—light.
- 13-4 Minimum packages, such as polyvinyl heat—seal packages shall not be opened until just before they are used. If opened, use the reels as soon as possible.
- 13-5 Solderability specified in composite specification 4/8 shall be for 6 months from the date of delivery on condition that they are stored at the environment specified clause 13-1 & 13-2.
For those parts which passed more than 6 months shall be checked solderability before it is used.