





CM0403CG T



- Family of 2-wire Common Mode Chokes
- Low profile surface mount package
- Range suited for many DSL and Telecom applications
- Operating Temperature: -40°C to +85°C
- Storage temperyure range:-40 to +125°C


Electrical Specification @25°C	
OCL:	PIN1-4 = PIN2-3 = 4.7mH +50%/-30% @10KHz/0.1V
RATED CURRENT	0.2A
Hi-POT :	800VAC
Turn Ratio:	1:1±5%
D.C.R:	PIN1-4 = PIN2-3 = 700mΩ MAX

Dimensions

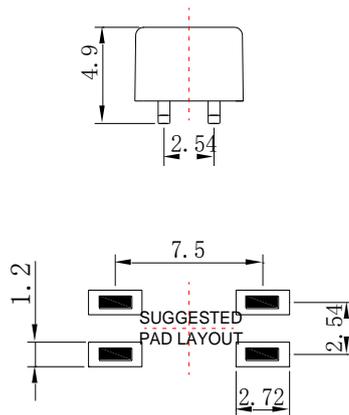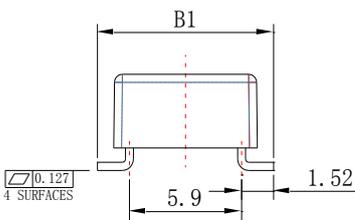



(Units: mm/inch, Unless otherwise specified, all tolerances are ±0.25)

Schematic



Package

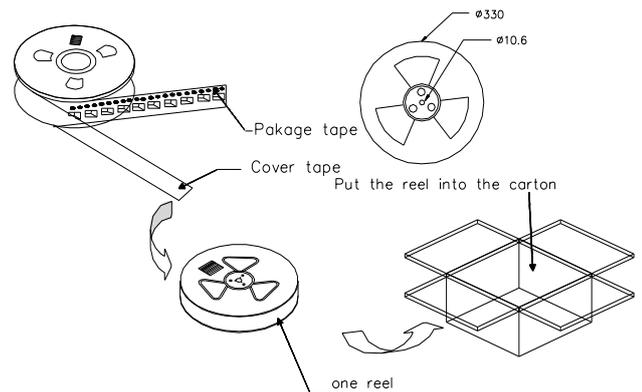

Q'TY:
1000PCS/REEL
10REELS/CASE
10000PCS/CASE