




CHIP COMMON MODE CHOKE

High Common Mode Impedance at High Frequency.
Excellent Noise Suppression Performance.
Small Size and Low Profile, Surface Mount Type.
Operating Temperature Range: -40 °C to +125 °C.
RoHS Compliant.
AEC-Q200 Compliant.




Part Number	Electrical Specifications @25°C						
	Common mode Impedance (Ω@10MHz)		Common mode Impedance (μH +50%/-30%)	DCR (Ω Max)	Rated Current mA Max	Rated Volt (Vdc Max)	IR M(Ω Min)
CM4532S-220-A T	500Min	1200Typ.	22	1.0	200	50	10

MECHANICAL


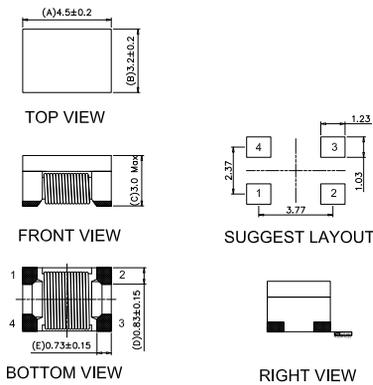


SCHEMATICS

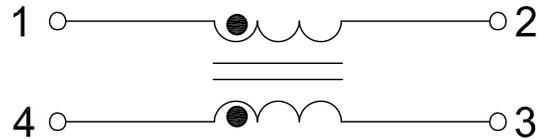

Unless otherwise specified all tolerances are: ±0.25 in mm

TAPING AND PACKING

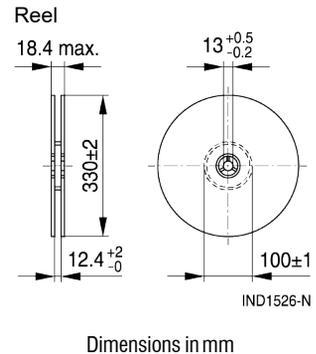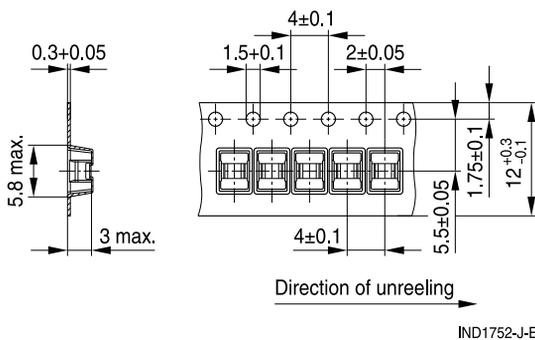

Quantity (pcs):
2000 PCS PER REEL
10 REELS PER CARTON
20000 PCS PER CARTON