



福建省长兴电子有限公司

CHANGXING ELECTRONICS CO., LTD.

福建省将乐县东门新村3号

NO.3 Dong Men New Village Jiangle Country, Fujian

电话: 86-598-2329554 传真: 86-598-2333554

石英晶体谐振器产品确认书

Quartz Crystal Resonator Specification For Approval

产品型号:	SMD3215 32.768KHz/7.0PF
Model	_____
客户名称:	_____
Customer	_____
客户编号:	_____
Customer's Part No.	_____
长兴编号:	8HSC327C0307L
Product No.	_____
发行日期:	_____
Issue Date	_____

承办: 吴丽萍

审核: 杨启付

批准: 吕锡昌

内容:

- 1、Features 特点
- 2、Electrical Specifications 电气参数
- 3、Dimensions 外型尺寸
- 4、Marking 印码
- 5、Reflow Condition 回流焊条件
- 6、Packing 包装 (EIA-481-2)
- 7、Reliability Specifications 可靠性规范

客户 Conclusion:

Conditional Approval Full Approval Reject

会 签 意 见	
------------------	--

APPROVED BY :

ISSUED DATE :

3. 2x1.5x0.75mm SMD kHz Crystals / 8H Series

■ Features 特点

- . 2 pads surface mount package.
- . Application for variety of automotive products reference clocks.
- . High reliable environmental performance.
- . RoHS compliant /Pb Free.

■ Electrical Specifications 电气参数

Standard atmospheric conditions

Unless otherwise specified, the standard range of atmospheric conditions for making measurement and tests are as follow:

Ambient temperatu: $22 \pm 5^{\circ}\text{C}$

Relative humidity : 40%~70%

If there is any doubt about the results, measurement shall be made within the following limits:

Ambient temperatu: $22 \pm 1^{\circ}\text{C}$


Relative humidity : 40%~70%

Measure equipment

Electrical characteristics measured by HP E5100A or equivalent.


	Parameters	Electrical Spec.	UNITS	Notes
1	Nominal Frequency	32.768000	KHz	-
2	Oscillation Mode	Fund	-	-
3	Load Capacitance	7	pF	-
4	Frequency Tolerance	± 20	ppm	at $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$
5	Turnover Temperature	25 ± 3	$^{\circ}\text{C}$	转换温度
6	Temperature Coefficient	$[-0.03 \pm 0.01]$ ppm/ $^{\circ}\text{C}$		二次温度系数
7	Operating Temperature	-40~+85	$^{\circ}\text{C}$	-
8	Aging	± 3	ppm	1st Year
9	Drive Level	0.1	uW	-
10	Effective Resistance Rr	70 Max.	K Ω	-
11	Shunt Capacitance C0	2 Max.	pF	-
12	Motional Capacitance C1	-	fF	-
13	Pulling Sensitivity TS	-	ppm/pF	-
14	Spurious Response	-	dB	-
15	Insulation Resistance	500 Min.	M Ω	at DC 100V
16	Storage Temperature Range	-55~+125	$^{\circ}\text{C}$	-
17	RLD2	- Max.	K Ω	-
18	FDDL	- Max.	ppm	
19	DLD2	- Max.	Ω	
20	FDLDH	-	ppm	
21	DLDH2	-	Ω	
22	DLDF	-	Ω	
23	DLD2 (低)	-	Ω	
24	MSL	Level 1	-	IPC/JEDEC J-STD-033C
25	Others	-	-	-

■ Dimensions外型尺寸

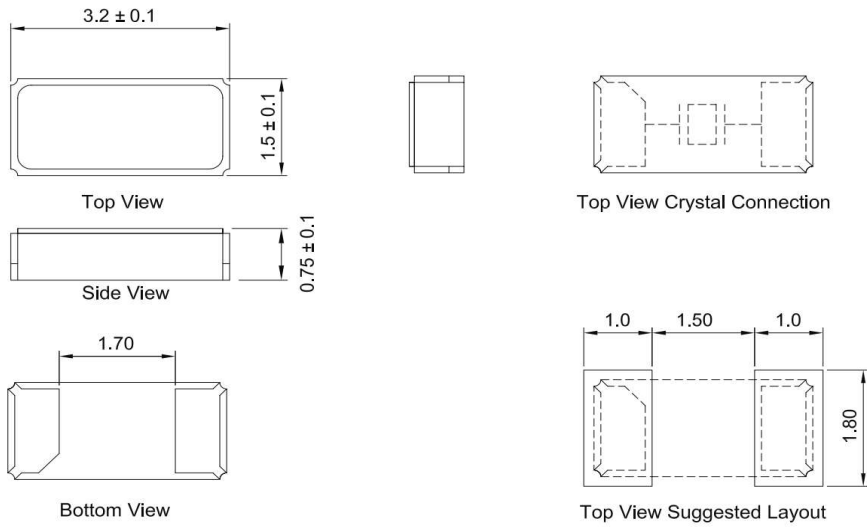


Units: mm


■ Marking印码

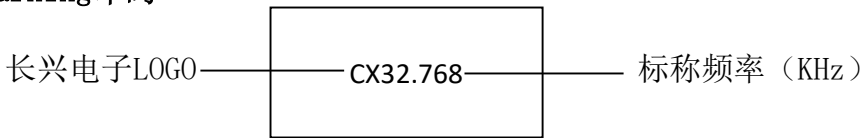



■ Reflow Condition回流焊条件

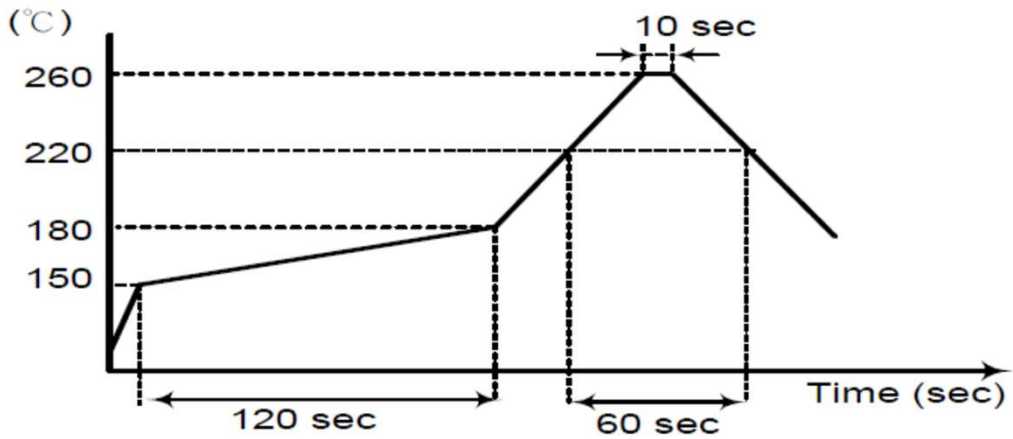

■ Packing包装 (EIA-481-2)

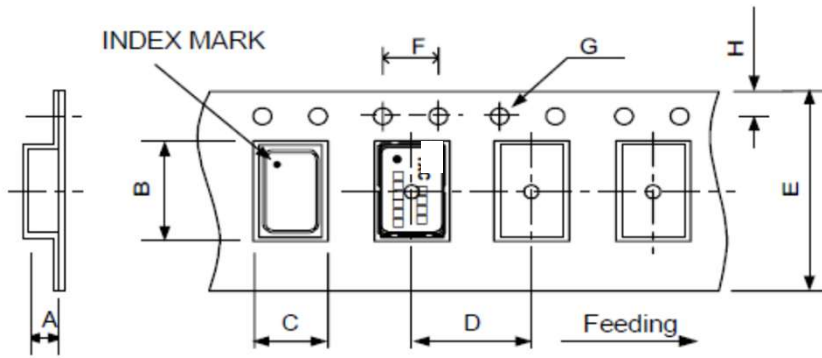

DIMENSIONS	A	B	C	D	E	F	G	H
UNIT : mm	1.05±0.1	3.45±0.1	1.75±0.1	4.00±0.1	8.0±0.2	4.00±0.1	1.55±0.05	1.75±0.1

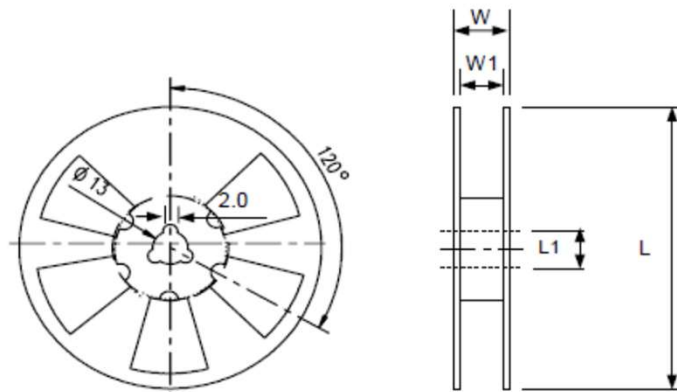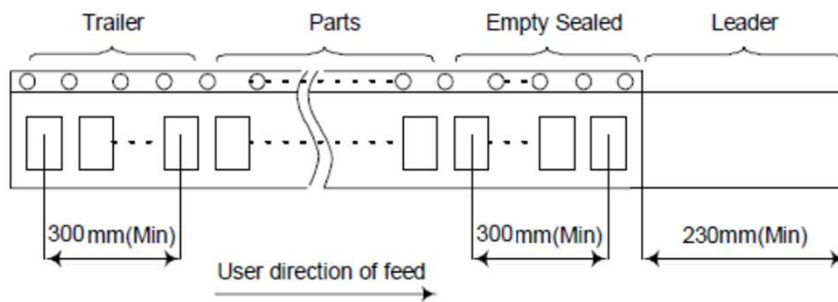


DIMENSIONS	L	L1	W	W1	Standard Reel Quantity
UNIT : mm	178±1.0	13±0.5	11.5±0.2	8.0+1.0	3,000 pcs per reel (WHITE)

■ Reliability Specifications (可靠性规范)

1. Mechanical Endurance (机械耐久性)

No.	Test Item	Test Methods	REF. DOC
1.1	Drop Test	150 cm height, 3 times on concrete floor .	JIS C6701
1.2	Shock Test	150g/150cm Height, 3 times in the direction of $\pm X$, $\pm Y$, $\pm Z$ on concrete floor	IEC-68-02-27
1.3	Mechanical Shock	Device are shocked to half sine wave (1000 G) three mutually perpendicular axes each 3 times. 0.5m sec. duration time	MIL-STD-202F
1.4	Vibration	Frequency range 10 ~2000 Hz Amplitude 1.52 mm/20G Sweep time 20 minute Perpendicular axes each test time 4 hours (Total test time 12 hours)	MIL-STD-883E
1.5	Gross Leak	Standard Sample For Automatic Gross Leak Detector, Test Pressure: 2Kg / cm ²	MIL-STD-883E
1.6	Fine Leak	Helium Bombing 4.5 Kgf / cm ² for 2 hr	
1.7	Solderability	Temperature 260 °C \pm 5°C Immersing depth 0.5 mm minimum Immersion time 5 \pm 1 seconds Flux Rosin resin methyl alcohol solvent (1 : 4)	MIL-STD-883E

2. Environmental Endurance (环境耐久性)

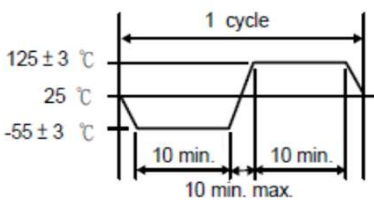No.	Test Item	Test Methods	REF. DOC
2.1	Resistance To Soldering Heat	Pre-heat temperature 125 °C Pre-heat time 60 ~ 120 sec. Test temperature 260 \pm 5 °C Test time 10 \pm 1 sec.	MIL-STD-202F
2.2	High Temp. Storage	+ 125 °C \pm 3 °C for 500 \pm 12 hours	MIL-STD-883E
2.3	Low Temp. Storage	- 40 °C \pm 3 °C for 500 \pm 12 hours	
2.4	Thermal Shock	Total 100 cycles of the following temperature cycle 	MIL-STD-883E
2.5	High Temp&Humidity	85°C \pm 3°C , RH 85% , 500Hrs	JIS C5023
2.6	Pressure Cooker Storage	125°C \pm 3°C , RH100% , 2 bar , 240Hrs	JIS C6701

Material Composition Declaration

材 料 成 份 表

1.PRODUCTION NAME : Seam 3215 kHz

2.PRODUCTION WEIGHT(mg) : 11.600

编号 No.	构成部件 Name of Part	部件材质名 Material Name	材质质量 Material Mass(mg)	材质质量百分比 Material mass (%)	构成之元素名称 Constituent name	CAS编号 CAS No.	元素百分比 Material Analysis(%)
1	基座 Base	陶瓷 Ceramics	4.507	38.85%	Al ₂ O ₃ Aluminum oxide	1344-28-1	92.40%
					SiO ₂ Siliconoxide	7631-86-9	4.31%
					Cr ₂ O ₃	1308-38-9	1.50%
					MgO Magnesium oxide	1309-48-4	0.69%
					CaO Calcium oxide	1305-78-8	1.10%
		KV环	1.831	15.78%	Fe Iron	7439-89-6	40.70%
					Ni Nickel	7440-02-0	21.80%
					Co	7440-48-4	12.80%
		焊料	2.817	24.28%	Ag silver	7440-22-4	21.00%
					Cu	7440-50-8	3.70%
		金属化 (Metal)	2.817	24.28%	W Tungsten	7440-33-7	100.00%
镀层 Metallizing	Au Gold				7440-57-5	100.00%	
				Ni Nickel	7440-02-0	100.00%	
2	外壳 Cover	4J29 (基材)	2.210	19.05%	Fe	7439-89-6	53.45%
					Ni	7440-02-0	29.25%
					Co	7440-48-4	17.30%
		Ni (镀层)	Ni	7440-02-0	100.00%		
3	黏合剂 Adhesive	金属 Metal	0.082	0.71%	Ag Silver	7440-22-4	75.00%
		聚合物 Polymer			C ₁₁ H ₂₄ Undecane	1120-21-4	5.00%
					C ₁₂ H ₂₆ Dodecane	112-40-3	5.00%
					Silicone resin	-	15.00%
4	Blank	晶片 Quartz	0.147	1.27%	SiO ₂ Silicon oxide	14808-60-7	100.00%
5	Electrode	电极 Electrode	0.006	0.05%	Au Gold	7440-57-5	63.93%
					Cr Chromium	7440-47-3	2.92%
					Ag silver	7440-22-4	33.15%