


Wire Wound Type Common Mode Filter




- 1.High common mode impedance at high frequency cause excellent noise suppression performance.
- 2.CWCM3225F series realizes small size and low profile. 3.2x2.5x2.2 mm.
- 3.100% Lead(Pb) & Halogen-Free and RoHS compliant.
- 4.Operating temperature-40~+105 C

Part Number	Common mode Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA)max.	Rated Volt. (Vdc)max.	Withstand Volt. (Vdc) max.	IR (Ω) min.
CWCM3225F-2-900T10	90±25%	100	0.05	1000	50	125	10M
CWCM3225F-2-601T10	600±25%	100	0.20	1000	50	125	10M
CWCM3225F-2-102T04	1000±25%	100	0.30	750	50	125	10M
CWCM3225F2SF-102T10	1000±25%	100	0.30	400	50	125	10M




MECHANICAL

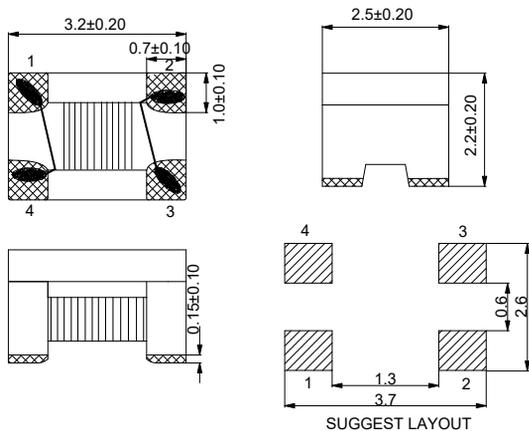

SCHEMATICS

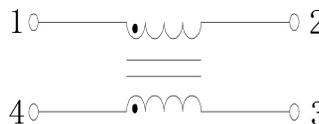


IMPEDEANCE FREQUENCY

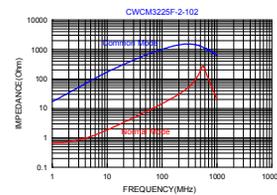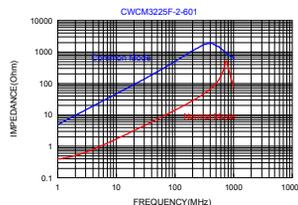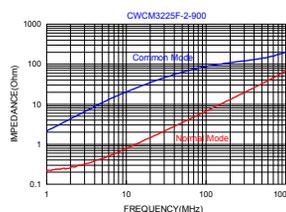


Dimension: mm

TAPING AND PACKING

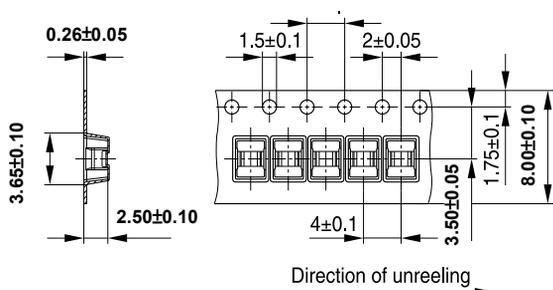

IND1752-J-E

Reel

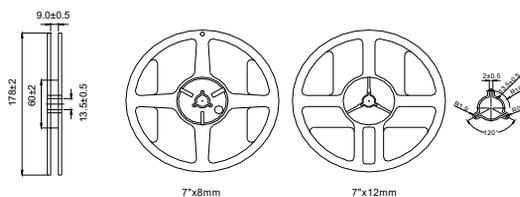

Quantity (pcs):
5000 PCS PER REEL
3REELS PER CARTON
15000PCS PER CARTON

Dimensions in mm